

Geniş Halka (Short Link Chains for Lifting Purposes)



Kod Code	Nominal Ölçü Nominal Size	WLL	MPF	BF	Yük Weight
	(mm)	(t)	(kN)	(kN)	(kg/m)
Enorm K	6 x 18	1,4	35,3	56,5	0,8
Enorm K	8 x 24	2,5	62,8	101	1,5
Enorm K	10 x 30	4	98,1	157	2,3
Enorm K	13 x 39	6,7	166	265	3,9
Enorm K	16 x 48	10	251	402	5,8
Enorm K	18 x 54	12,5	318	509	7,4
Enorm K	22 x 66	19	475	760	11
Enorm K	26 x 78	26,5	664	1060	15,9


- Değişik zincir ısılarına göre izin verilen yük limitleri (EN 818-6 standartlarına göre):
- Allowed working loads (EN 818-6) for different chain temperature.

- 40° C bis + 200° C = 100%
 200° C bis + 300° C = 90%
 300° C bis + 400° C = 75%

Once the Enorm - chain has cooled down to room temperature it can be again used to 100%.
 Once the Enorm - chain has cooled down to room temperature it can be again used to 100%.




Geniş Halka (Master Links for Coupling Assembly System)

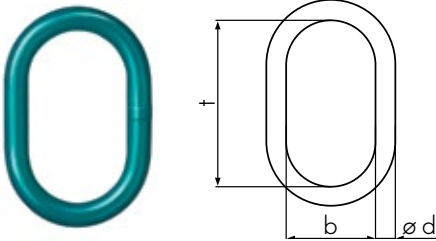

- For single-leg chain slings.
- For single-leg chain slings.


Kod Code	WLL	ød	b	t	Yük Weight
	t		(mm)		(kg)
Enorm AE 1 - 6	1,4	13	60	110	0,35
Enorm AE 1 - 8	2,5	16	60	110	0,6
Enorm AE 1 - 10	4	18	75	135	0,9
Enorm AE 1 - 13	6,7	22	90	160	1,5
Enorm AE 1 - 16	10	26	100	180	2,35
Enorm AE 1 - 18	12,5	32	110	200	3,85
Enorm AE 1 - 22	19	36	140	260	6,2
Enorm AE 1 - 26	26,5	45	180	340	13,0

Geniş Halka (Master Links for Coupling Assembly System)

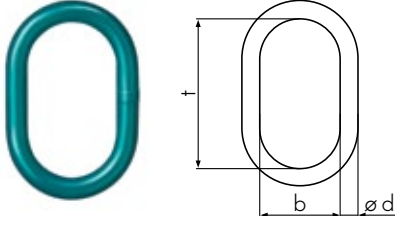

- For two-leg chain slings.
- For two-leg chain slings.


Kod Code	WLL		ød	b	t	Yük Weight
	0°-45° (t)	45°-60° (t)				
Enorm AE 2 6	2	1,4	13	60	110	0,35
Enorm AE 2 8	3,55	2,5	18	75	135	0,9
Enorm AE 2 10	5,6	4	22	90	160	1,5
Enorm AE 2 13	9,5	6,7	26	100	180	2,35
Enorm AE 2 16	14	10	32	110	200	3,85
Enorm AE 2 18	18	12,5	36	140	260	6,2
Enorm AE 2 22	26,5	19	45	180	340	13,0
Enorm AE 2 26	37	26,5	56	200	400	23,54

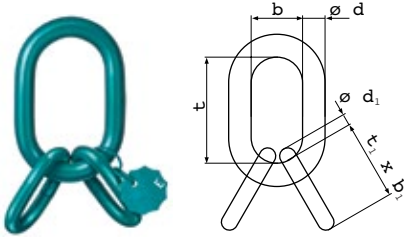

- For three or four-leg chain slings.
- For three or four-leg chain slings.

Kod Code	WLL		ød	b	t	Yük Weight
	0°-45° (t)	45°-60° (t)				
Enorm AE 2 6	2	1,4	13	60	110	0,35
Enorm AE 2 8	3,55	2,5	18	75	135	0,9
Enorm AE 2 10	5,6	4	22	90	160	1,5
Enorm AE 2 13	9,5	6,7	26	100	180	2,35
Enorm AE 2 16	14	10	32	110	200	3,85
Enorm AE 2 18	18	12,5	36	140	260	6,2
Enorm AE 2 22	26,5	19	45	180	340	13,0
Enorm AE 2 26	37	26,5	56	200	400	23,54

Geniş Halka (Program of Hooks)

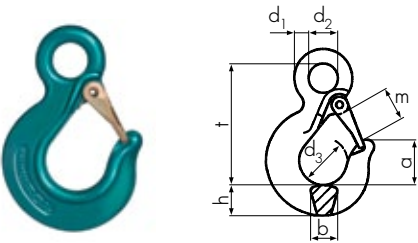

- Eye sling hooks EN 1677-2.
- Eye sling hooks EN 1677-2

Kod Code	WLL	a	b	d1	d2	d3	h	m	t	Yük Weight
	t				mm					kg
TOE 6	1,4	32	16	12	27	34	21	22	91	0,45
TOE 8	2,5	44	21	13	29	48	27	31	112	0,7
TOE 10	4	52	26	17	35	54	36	37	138	1,46
TOE 13	6,7	67	33	20	41	70	47	47	170	2,6
TOE 16	10	61	37	26	54	70	49	51	192	3,9
TOE 18	12,5	71	43	31	45	72	57	54	213	5,9
TOE 22	19	94	48	36	50	92	68	68	260	9,5
TOE 26	26,5	90	58	33	60	95	80	69	265	11,4